

**PROCEDURA PER LA SOSTITUZIONE DELLA SCHEDA DI SCHEDA POTENZA PJ029 VGP
PROCEDURE TO REPLACE THE POWER BOARD PJ029 VGP**

COD.1601838

COD.1601838



CONTENUTO DEL KIT PER LA RIPARAZIONE / KIT CONTENT FOR REPLACEMENT:

- 1X 1400661 SCHEDA POTENZA J029_0 230V MC TRIFASE CON RELÉ SICUREZZA (DAL 01.01.2010) / POWER BOARD J029 230V MC WITH SAFETY RELAY(FROM 01.01.2010)
- 1X 1400499 MORSETTIERA 4 VIE PER SCHEDE CON RELE' DI SICUREZZA (CN7) / 4-WAY TERMINAL BOX (CN7) FOR SAFETY RELAY BOARDS
- 1X FOGLIO ALLEGATO – ATTACHED SHEET

IDENTIFICAZIONE SCHEDA DA SOSTITUIRE – DEFECT BOARD IDENTIFICATION

SCHEDA POTENZA TIPO B093_0 COD.1400232
POWER BOARD TYPE B093_0 COD.1400232

SCHEDA POTENZA TIPO PJ029 COD. 1400661
POWER BOARD TYPE PJ029 COD. 1400661

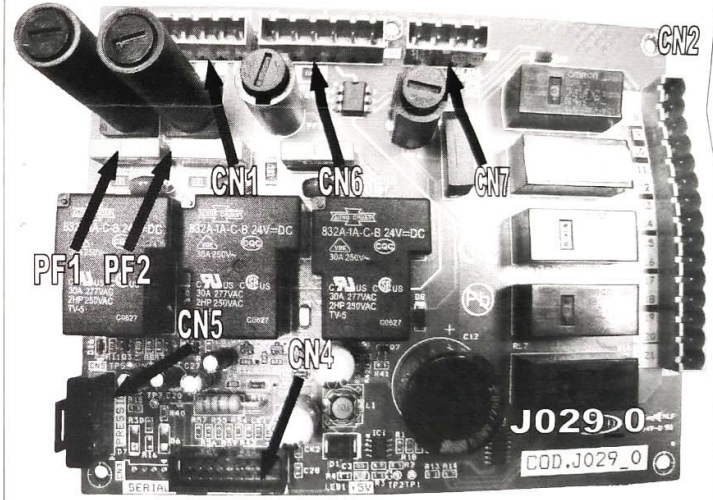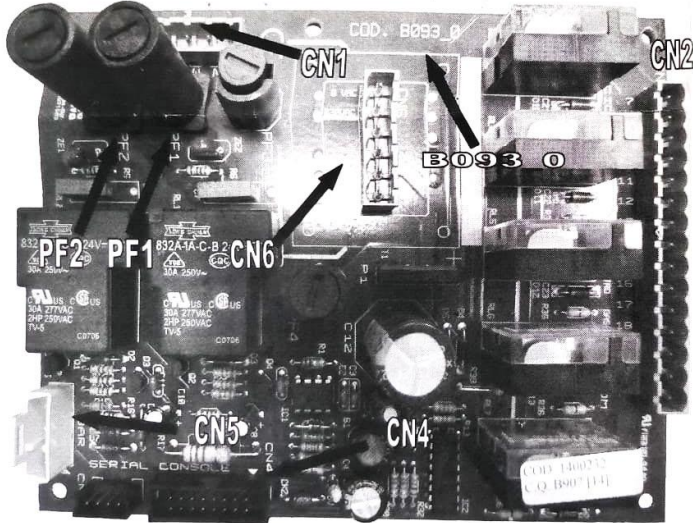

PROCEDURA PER LA SOSTITUZIONE SCHEDA POTENZA B093_0 CON SCHEDA PJ029

1. RIMUOVERE LE MORSETTIERE CN1, CN2, CN6
2. RIMUOVERE CONNETTORE SU CN4 E CN5.
3. RIMUOVERE LA SCHEDA E POSIZIONARE QUELLA SOSTITUTIVA.
4. COLLEGARE LE MORSETTIERE (CN1, CN2 E CN6) E I CONNETTORI (CN4 E CN5) SCOLLEGATI IN PRECEDENZA.
5. COLLEGARE LA MORSETTIERA A 4 VIE CN7 IN DOTAZIONE.

PROCEDURE TO REPLACE B093_0 POWER BOARD WITH PJ029 POWER BOARD

1. REMOVE CN1, CN2 E CN6 TERMINALS BOX.
2. REMOVE CN4 AND CN5 CONNECTOR.
3. REMOVE DEFECT BOARD AND REPLACE WITH THE NEW ONE.
4. CONNECT ALL THE TERMINALS BOX (CN1, CN2 E CN6) AND CONNECTORS (CN4 AND CN5) PREVIOUSLY REMOVED.
5. CONNECT THE 4 WAYS TERMINAL BOX CN7 INCLUDED

PROCEDURA PER LA SOSTITUZIONE DELLA SCHEDA POTENZA PJ029 CON SCHEDA EQUIVALENTE

1. RIMUOVERE LE MORSETTIERE CN1, CN2, CN6 AND CN7
2. RIMUOVERE CONNETTORE SU CN4 E CN5.
3. RIMUOVERE LA SCHEDA E POSIZIONARE QUELLA SOSTITUTIVA.
4. COLLEGARE LE MORSETTIERE (CN1, CN2, CN6 AND CN7) E I CONNETTORI (CN4 E CN5) SCOLLEGATI IN PRECEDENZA. LA MORSETTIERA A 4 VIE INCLUSA NON E' NECESSARIA.

PROCEDURE TO REPLACE J029 POWER BOARD WITH THE SAME BOARD TYPE

1. REMOVE CN1, CN2, CN6 E CN7 TERMINALS BOX
2. REMOVE CN4 AND CN5 CONNECTOR
3. REMOVE DEFECT BOARD AND REPLACE WITH THE NEW ONE.
4. CONNECT ALL THE TERMINALS BOX (CN1, CN2, CN6 AND CN7) AND CONNECTORS PREVIOUSLY REMOVED (CN4 AND CN5). 4-WAY TERMINAL IS NOT NECESSARY.